


DIMENSIONS

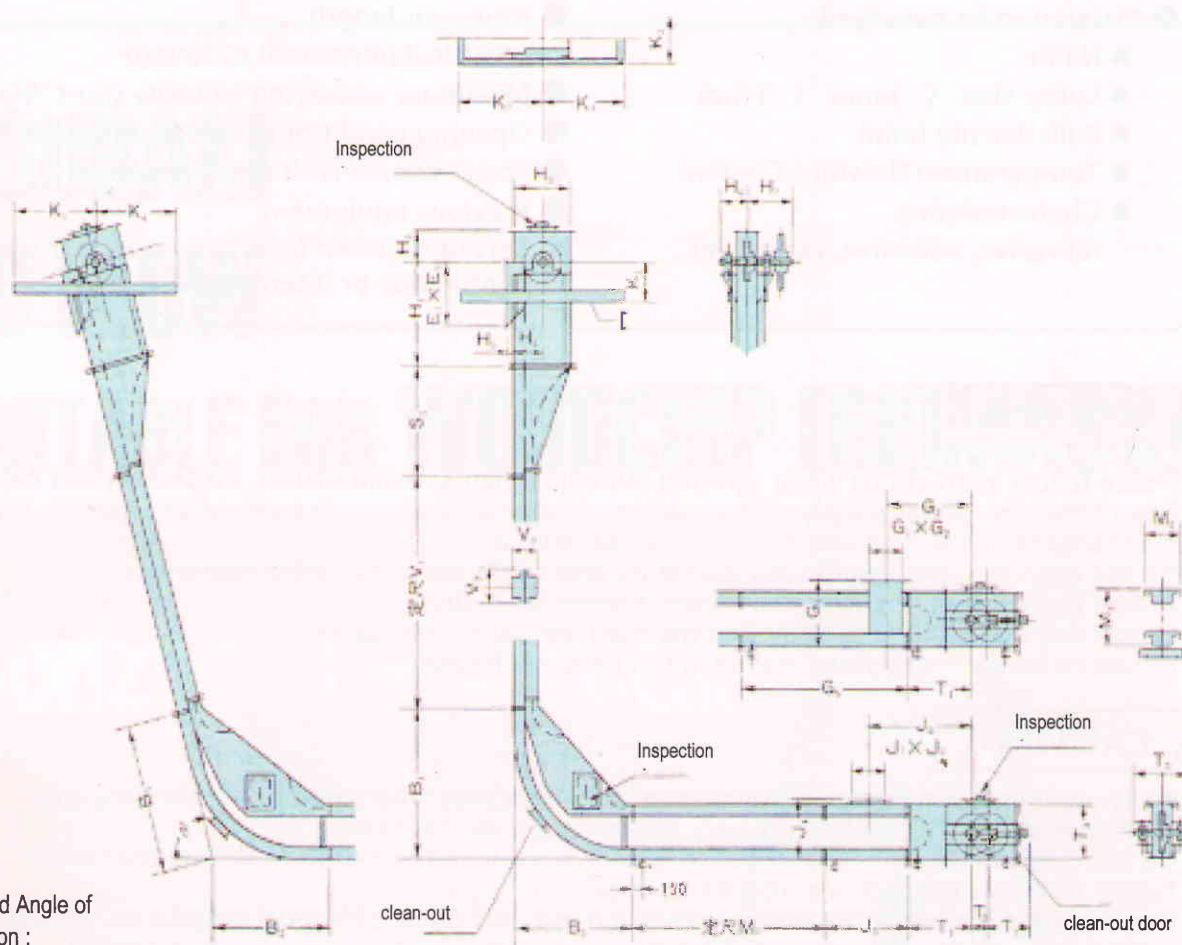

Standard Angle of Inclinin :
45° 60° 75° 90°

Model No.	Head Unit							Outlet		Head Suport							
	H ₁	H ₂	H ₃	H ₄	H ₅	H ₆	H ₇	E ₁	E ₂	L	K ₂	90° ≥ θ ≥ 60°			60° ≥ θ ≥ 45°		
	K ₁	K ₂	K ₃	K ₄	K ₅	K ₆	K ₇										
LC160	1,100	287	570	263	100	245	385	650	210	[100×50]	419	400	850	850	440	850	1,050
LC240	1,200	357	710	327	100	300	440	750	300	[125×65]	539	470	1,000	1,000	530	1,000	1,300
LC320	1,500	437	870	406	100	375	555	900	400	[150×75]	689	570	1,250	1,250	630	1,250	1,600
LC410	1,600	565	1,120	516	100	450	650	1,000	500	[150×75]	789	630	1,450	1,450	720	1,450	1,900

Model No.	Inclin Unit	Vertical Unit			Bending		Horizontal Unit			Upper feed Unit				
	S ₁	V ₁	V ₂	V ₃	B ₁	B ₂	M ₁	M ₂	M ₃	J ₁	J ₂	J ₃	J ₄	J ₅
LC160	1,000	3,000	236	264	1,500	1,300	3,000	250	488	320	160	1,100	528	900
LC240	1,200	3,000	316	327	1,700	1,500	3,000	330	609	400	240	1,300	649	1,100
LC320	1,500	3,000	420	407	2,100	1,800	3,000	435	744	490	320	1,600	794	1,300
LC410	1,900	3,000	510	502	2,600	2,300	3,000	530	954	580	410	1,900	1,004	1,600

Model No.	Lower feed Unit					Tail Unit				
	G ₁	G ₂	G ₃	G ₄	G ₅	T ₁	T ₂	T ₃	T ₄	T ₅
LC160	320	400	900	565	1,250	650	150	413	487	440
LC240	400	600	1,050	726	1,900	750	200	473	608	530
LC320	490	800	1,300	905	2,550	950	250	563	743	660
LC410	580	1,000	1,500	1,160	3,000	1,100	350	690	954	800